

9.7" P-cap Touch Monitor



Model	H1015P-UC
Touch Technology	P-cap
Version	V 1.0

The Horsent H1015P-UC is a open-frame multi-touch monitor designed for vertical market applications, such as financial, gaming, industrial, self-service terminal, etc.

H1015P-UC employs high performance PCAP touch technology, it delivers excellent 10-point touch experience to users and makes the front surface be true flat.

The high grade display module delivers high-resolution and clarity images. Its LED backlit not only prolongs the work life, but also decrease power consumption and module weight.

The H1015P-UC features a special designed injection-molded front bezel, it makes the touch monitor can be flush mounted with cabinets and improves the dust- and water-resistant seal level significantly.

The H1015P-UC has CE / FCC / CCC approvals and a compact form factor, it can be easily integrated with multiple mounting options.


- ➤ 10-point multi touch
- > Precision bezel
- > High seal level
- > Accuracy touch
- > Compact form factor
- Easy to install
- > Flush mounted


- ➤ ATM
- > Tickets machine
- > Vending machine
- > Information terminal
- > Gaming machine



⚠ Product specification

Product Name		9.7 inch LCD Touch Monitor
Product Model		H1015P-UC
LCD panel Technical Parameter	Size	9.7 inch
	Aspect Ratio	4:3
	Backlight Type	LED Backlight
	Pixel Pitch	0.192mm x 0.192mm
	Active Area	196.608mm x 147.456mm
	Best Resolution	1024 × 768 @ 60 Hz
	Response Time	25 ms
	Color	16.7 million
	Brightness	LCD Panel: 350 cd/m ²
	Contrast Ratio	800:1 (standard Values)
	Viewing Angle (CR > 10)	Horizontal: 170° (85°/85°) Vertical: 170° (85°/85°)
	Video Input Format	RGB Analog Signal/ Digital Signal
	Video Input Interface	VGA / DVI-D
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz
	Power Consumption	≤9W
	Warranty	1 Year
Touch Screen	Touch Screen Type	Capacitive Touch Screen
Technical Parameter	Cover Glass	2.0mm
	Transparency	87%
	Hardness	7H
	Interface	USB2.0
	Touch Point	10
	Response Time	≤10 ms
	Touch Method	Finger / Capacitive Pen
	Touch Lifespan	≥50,000,000
	Linearity	< 2%
	Single-point OS	Windows XP , Linux
	Multi-point OS	Windows7/8 , Android
	Warranty	1 Year
Touch Monitor Technical Parameter	Boundary Dimension	239.40mm × 218.20mm × 33.70mm
	OSD Panel	Optional Accessory : Power switch、Menu、Up、Auto、Down
	Power Supply	Input: DC 12V±5%
	Power Consumption	Max: 11w; Sleep: 1w; Off: 0.5w
	Installation	Side Mounting Bracket
	Accessory	Signal Line VGA, D-SUB 15 pin, male to male, 1.5m
	(Optional)	USB Wire A male to B male , 1.8m
		Adaptor WT1203000 ,12V/3.0A ,115mmx47mmx31mm
		Length 1.0m , ¢ 2.5 , Black
	T	Power Line CCC Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C; Storage: -20°C-60°C
	Humidity	Operating: 20%-80%; Storage: 10%-90%
	Operation Altitude	<3000m
	Warranty	3 Years

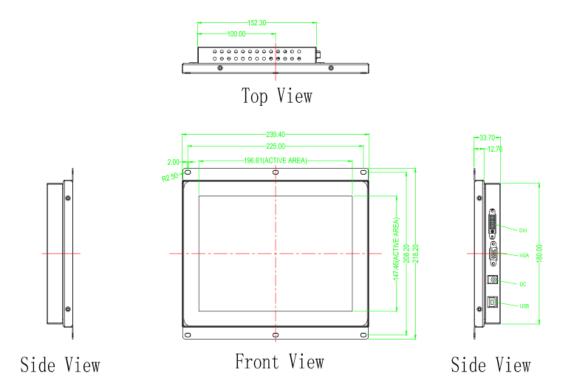

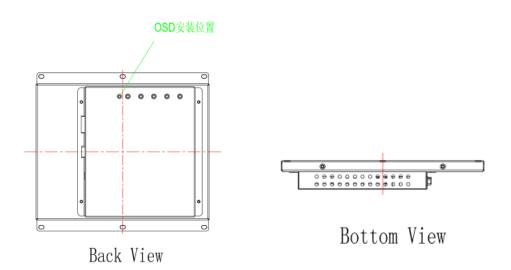





9.7" P-cap **Touch Monitor**







