

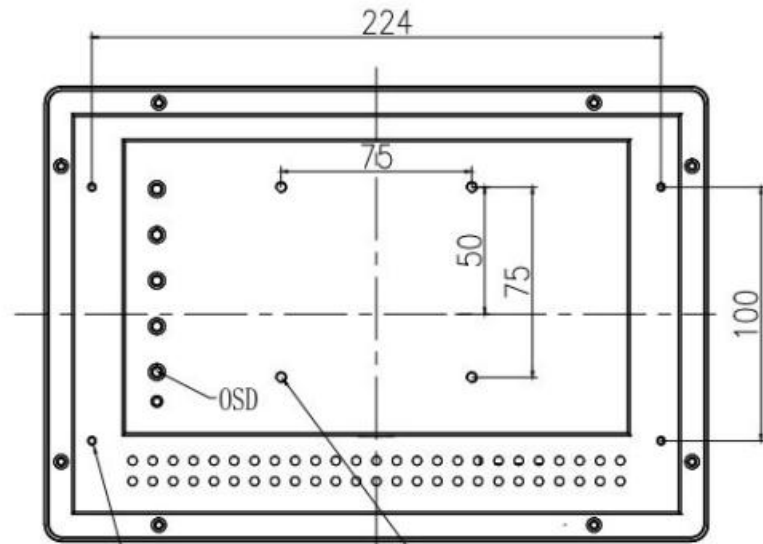


10.1" P-cap Thin Touch Monitor

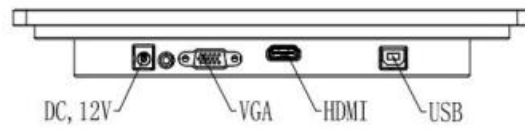

Model	H1016PW-UH
Touch Technology	P-cap
Version	V 1.0

Product Name		10.1 inch LCD Thin Touch Monitor		
Product Model		H1016PWH-UH		
LCD panel Technical Parameter	Size	10.1inch		
	Aspect Ratio	16:10		
	Backlight Type	LED Backlight		
	Pixel Pitch	0.1695mm x 0.1695mm		
	Active Area	216.96mm x 135.60mm		
	Best Resolution	1280×800@ 60 Hz		
	Response Time	30 ms		
	Color	16.7 million		
	Brightness	LCD Panel: 400cd/m ²		
	Contrast Ratio	900:1 (standard Values)		
	Viewing Angle (CR > 10)	Horizontal: 170° (85°/85°) Vertical: 170° (85°/85°)		
	Video Input Format	RGB Analog Signal/ Digital Signal		
	Video Input Interface	VGA / HDMI		
	Input Frequency	Horizontal: 54~90 KHz Vertical :49~76 Hz		
	Power Consumption	≤6W		
	Warranty	1 Year		
Touch Screen Technical Parameter	Touch Screen Type	Capacitive Touch Screen		
	Cover Glass	1.1mm		
	Transparency	85%		
	Hardness	7H		
	Interface	USB2.0		
	Touch Point	10		
	Response Time	≤10 ms		
	Touch Method	Finger / Capacitive Pen		
	Touch Lifespan	≥50,000,000		
	Linearity	< 2%		
	Single-point OS	Windows XP , Linux		
	Multi-points OS	Windows7/8/10 , Android		
	Warranty	1 Year		
	Touch Monitor Technical Parameter	Boundary Dimension	261.4mm ×179.4mm ×34.0mm	
OSD Panel		Optional Accessory : Power switch、Menu、Up、Auto、Down		
Power Supply		Input : DC 12V±5%		
Power Consumption		Max : 10w		
Installation		VESA 75mm		
Accessory (Optional)		Signal Line	VGA/HDMI, 1.8m, male to male	
		USB Wire	A male to B male , 1.8m	
		Adaptor	WT1203000 ,12V/3.0A ,115mmx47mmx31mm , Length 1.0m , φ 2.0 , Black	
		Power Line	Power Line, 1.0m , Black	
Temperature		Operating: 0°C-40°C ; Storage: -20°C-60°C		
Humidity		Operating: 20%-80%; Storage: 10%-90%		
Operation Altitude		< 3000m		
Warranty		1 Year		

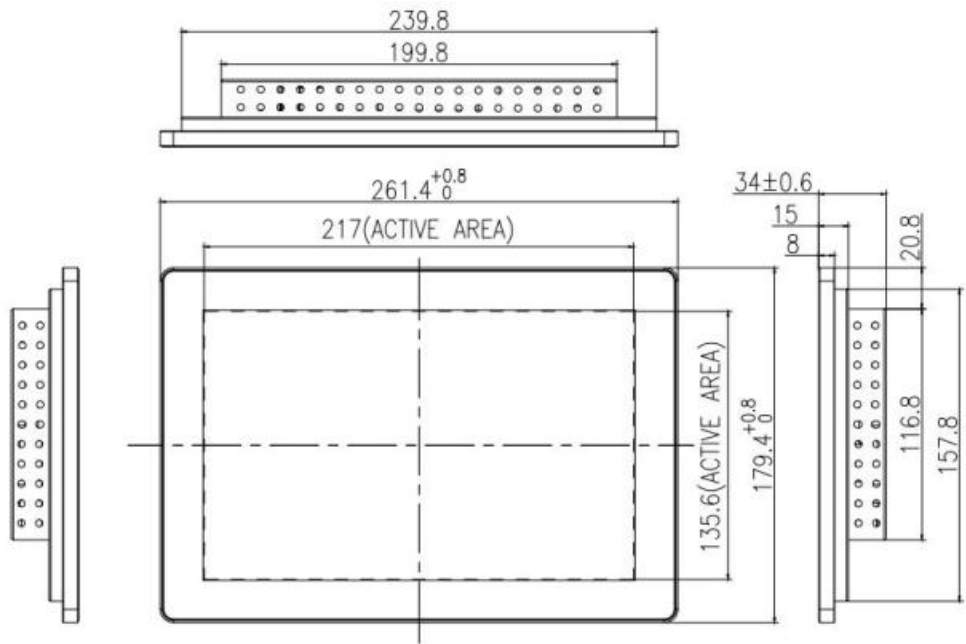

VESA:M3 THREAD
MAX:SCREW DEPTH=3mm
X4

VESA:M4 THREAD
MAX:SCREW DEPTH=5mm
X4