

15" Open frame Touch Monitor

Model	H1512W-UC
-------	-----------

Touch Technology	P-cap
------------------	-------

Version	V 1.0
---------	-------

All right reserved, Horsent Technology Co., Ltd



Open-frame Touch Monitor

Horsent designs H1512P-UC open-frame multi-touch monitor for high traffic vertical applications, such as finance, gaming, industry, self-service terminal, etc.

The H1512P-UC applies high performance PCAP touch technology, offers excellent 10-point touch and tablet-like user experience.

The durable, light weighted, display module delivers image with high resolution and clarity, but still low power consumption.

The H1512P-UC features a special designed mounted-molded front bezel, enables perfect matched mounting to your kiosk with great dust&water resistance.



Features

- 10-point touch
- Slim bezel
- Firmly sealed
- Accurate touch
- Compact design
- Easy to install
- Flush mounted




Applications

- ATM
- Tickets machine
- Vending machine
- Information terminal
- Gaming machine

Product Name		15 inch LCD Touch Monitor
Product Model		H1512P-UC
LCD panel Technical Parameter	Size	15inch
	Aspect Ratio	4 : 3
	Backlight Type	LED Backlight
	Pixel Pitch	0.297mm x 0.297mm
	Active Area	304.128mm x 228.096mm
	Best Resolution	1280 ×1024@60 Hz
	Response Time	35 ms
	Color	16.7million
	Brightness	LCD Panel: 300 cd/m ²
	Contrast Ratio	1500:1 (standard Values)
	Viewing Angle (CR > 10)	Horizontal: 178° (89°/89°) Vertical: 178° (89°/89°)
	Video Input Format	RGB Analog Signal/ Digital Signal
	Video Input Interface	VGA / DVI
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz
	Power Consumption	≤15W
Touch Screen Technical Parameter	Touch Screen Type	Capacitive Touch Screen
	cover Glass	2.4mm
	Transparency	87%
	Hardness	7H
	Interface	USB2.0
	Touch Point	10
	Response Time	≤15 ms
	Touch Method	Finger / Capacitive Pen
	Touch Lifespan	≥50,000,000
	Linearity	< 2%
Touch Monitor Technical Parameter	Single-point OS	Windows XP , Linux
	Multi-point OS	Windows7/8/10 , Android
	Boundary Dimension	350.5mm × 274.5mm × 43.9mm
	OSD Panel	Optional Accessory : Power switch、Menu、Up、Auto、Down
	Power Supply	Input : DC 12V±5%
	Power Consumption	Max : 20w; Sleep : 2w; Off : 1w
	Installation	Side Mounting Bracket , VESA 75mm&100mm
	Accessory (Optional)	Signal Line VGA , D-SUB 15pin , male to male , 1.5m
		USB Wire A male to B male , 1.8m
		Adaptor WT1203000 , 12V/3.0A , 115mmx47mmx31mm , Length 1.0m , ϕ 2.5 , Black
		Power Line CCC Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C ; Storage: -20°C-60°C
	Humidity	Operating: 20%-80%; Storage: 10%-90%
	Operation Altitude	< 3000m
	Warranty	3 Years(touch screen and LCD panel 1year)




Product drawing

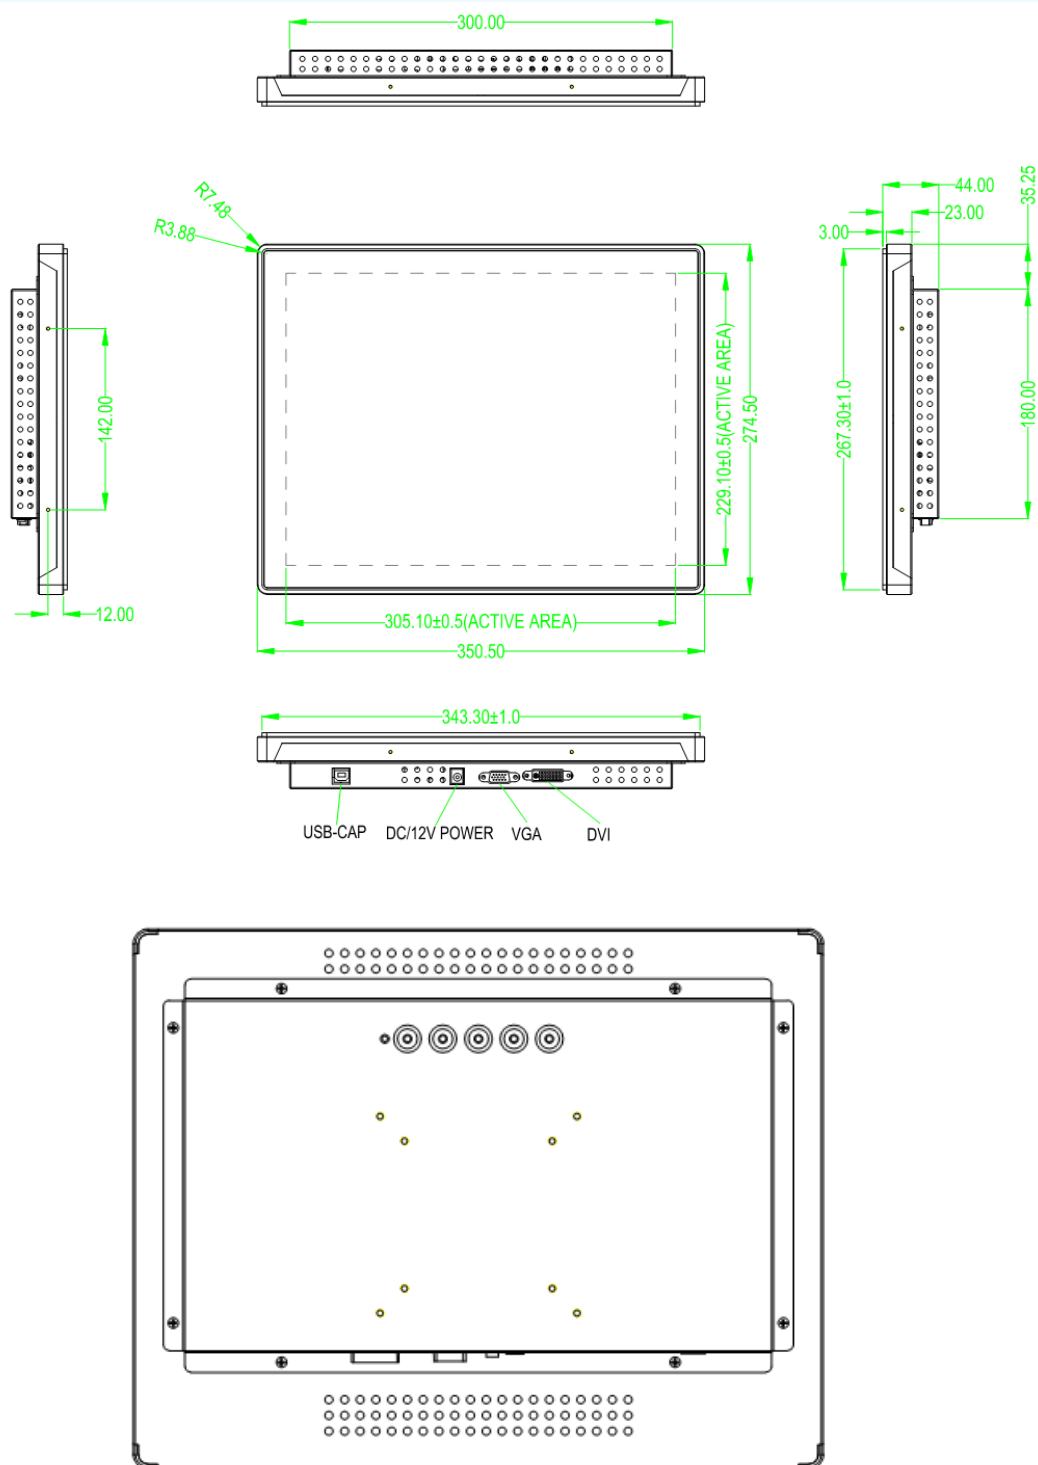



Product drawing

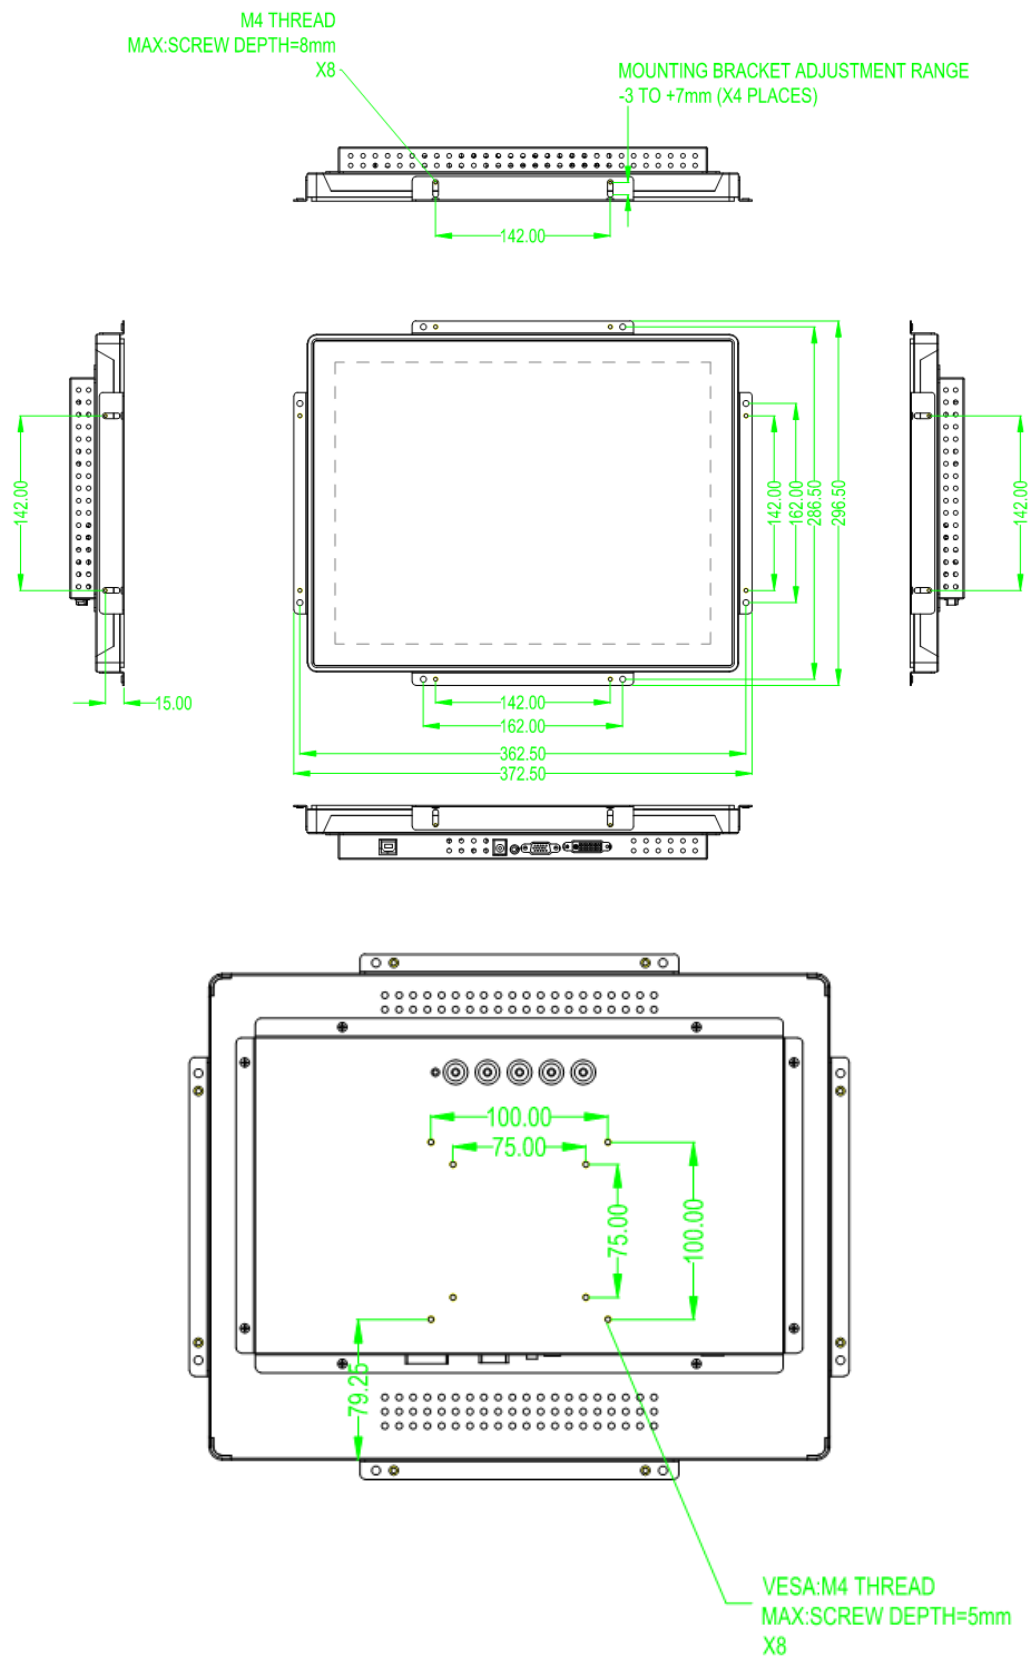



15" P-cap Touch Monitor

