

15" Open frame Touch Monitor

Model	H1512W-UC
-------	-----------

Touch Technology	P-cap
------------------	-------

Version	V 1.0
---------	-------

All right reserved, Horsent Technology Co., Ltd



Open-frame Touch Monitor

Horsent designs H1512P-UC open-frame multi-touch monitor for high traffic vertical applications, such as finance, gaming, industry, self-service terminal, etc.

The H1512P-UC applies high performance PCAP touch technology, offers excellent 10-point touch and tablet-like user experience.

The durable, light weighted, display module delivers image with high resolution and clarity, but still low power consumption.

The H1512P-UC features a special designed mounted-molded front bezel, enables perfect matched mounting to your kiosk with great dust&water resistance.



Features


- 10-point touch
- Slim bezel
- Firmly sealed
- Accurate touch
- Compact design
- Easy to install
- Flush mounted




Applications

- ATM
- Tickets machine
- Vending machine
- Information terminal
- Gaming machine

Product Name		15 inch LCD Touch Monitor	
Product Model		H1512P-UC	
LCD panel	Size	15inch	
Technical Parameter	Aspect Ratio	4 : 3	
	Backlight Type	LED Backlight	
	Pixel Pitch	0.297mm x 0.297mm	
	Active Area	304.128mm x 228.096mm	
	Best Resolution	1280 ×1024@60 Hz	
	Response Time	35 ms	
	Color	16.7million	
	Brightness	LCD Panel: 300 cd/m²	
	Contrast Ratio	1500:1 (standard Values)	
	Viewing Angle (CR > 10)	Horizontal: 178° (89°/89°) Vertical: 178° (89°/89°)	
	Video Input Format	RGB Analog Signal/ Digital Signal	
	Video Input Interface	VGA / DVI	
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz	
	Power Consumption	≤15W	
Touch Screen	Touch Screen Type	Capacitive Touch Screen	
Technical Parameter	cover Glass	2.4mm	
	Transparency	87%	
	Hardness	7H	
	Interface	USB2.0	
	Touch Point	10	
	Response Time	≤15 ms	
	Touch Method	Finger / Capacitive Pen	
	Touch Lifespan	≥50,000,000	
	Linearity	< 2%	
	Single-point OS	Windows XP , Linux	
	Multi-point OS	Windows7/8/10/11, Android	
Touch Monitor	Boundary Dimension	350.5mm × 274.5mm × 43.9mm	
	OSD Panel	Optional Accessory : Power switch、 Menu、 Up、 Auto、 Down	
	Power Supply	Input : DC 12V±5%	
	Power Consumption	Max : 20w; Sleep : 2w; Off : 1w	
	Installation	Side Mounting Bracket , VESA 75mm&100mm	
	Accessory (Optional)	Signal Line	VGA , D-SUB 15pin , male to male , 1.5m
		USB Wire	A male to B male , 1.8m
		Adaptor	WT1203000 , 12V/3.0A , 115mmx47mmx31mm , Length 1.0m , ϕ 2.5 , Black
		Power Line	CCC Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C ; Storage: -20°C-60°C	
	Humidity	Operating: 20%-80%; Storage: 10%-90%	
	Operation Altitude	< 3000m	
	Warranty	3 Years(touch screen and LCD panel 1year)	

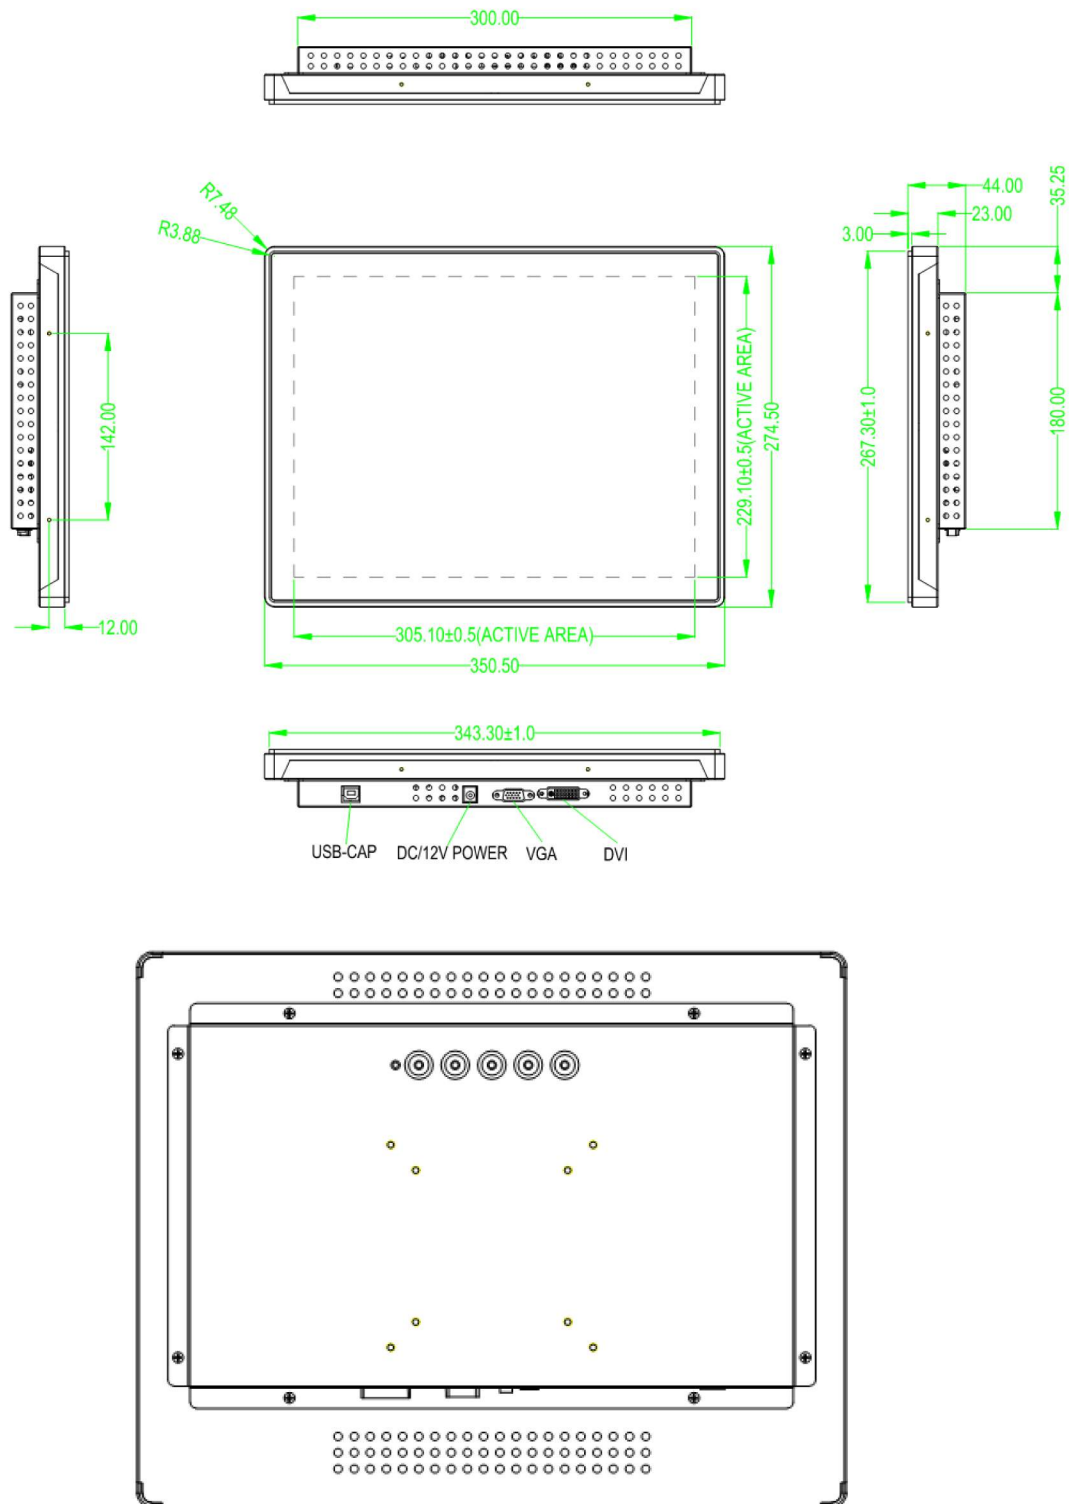

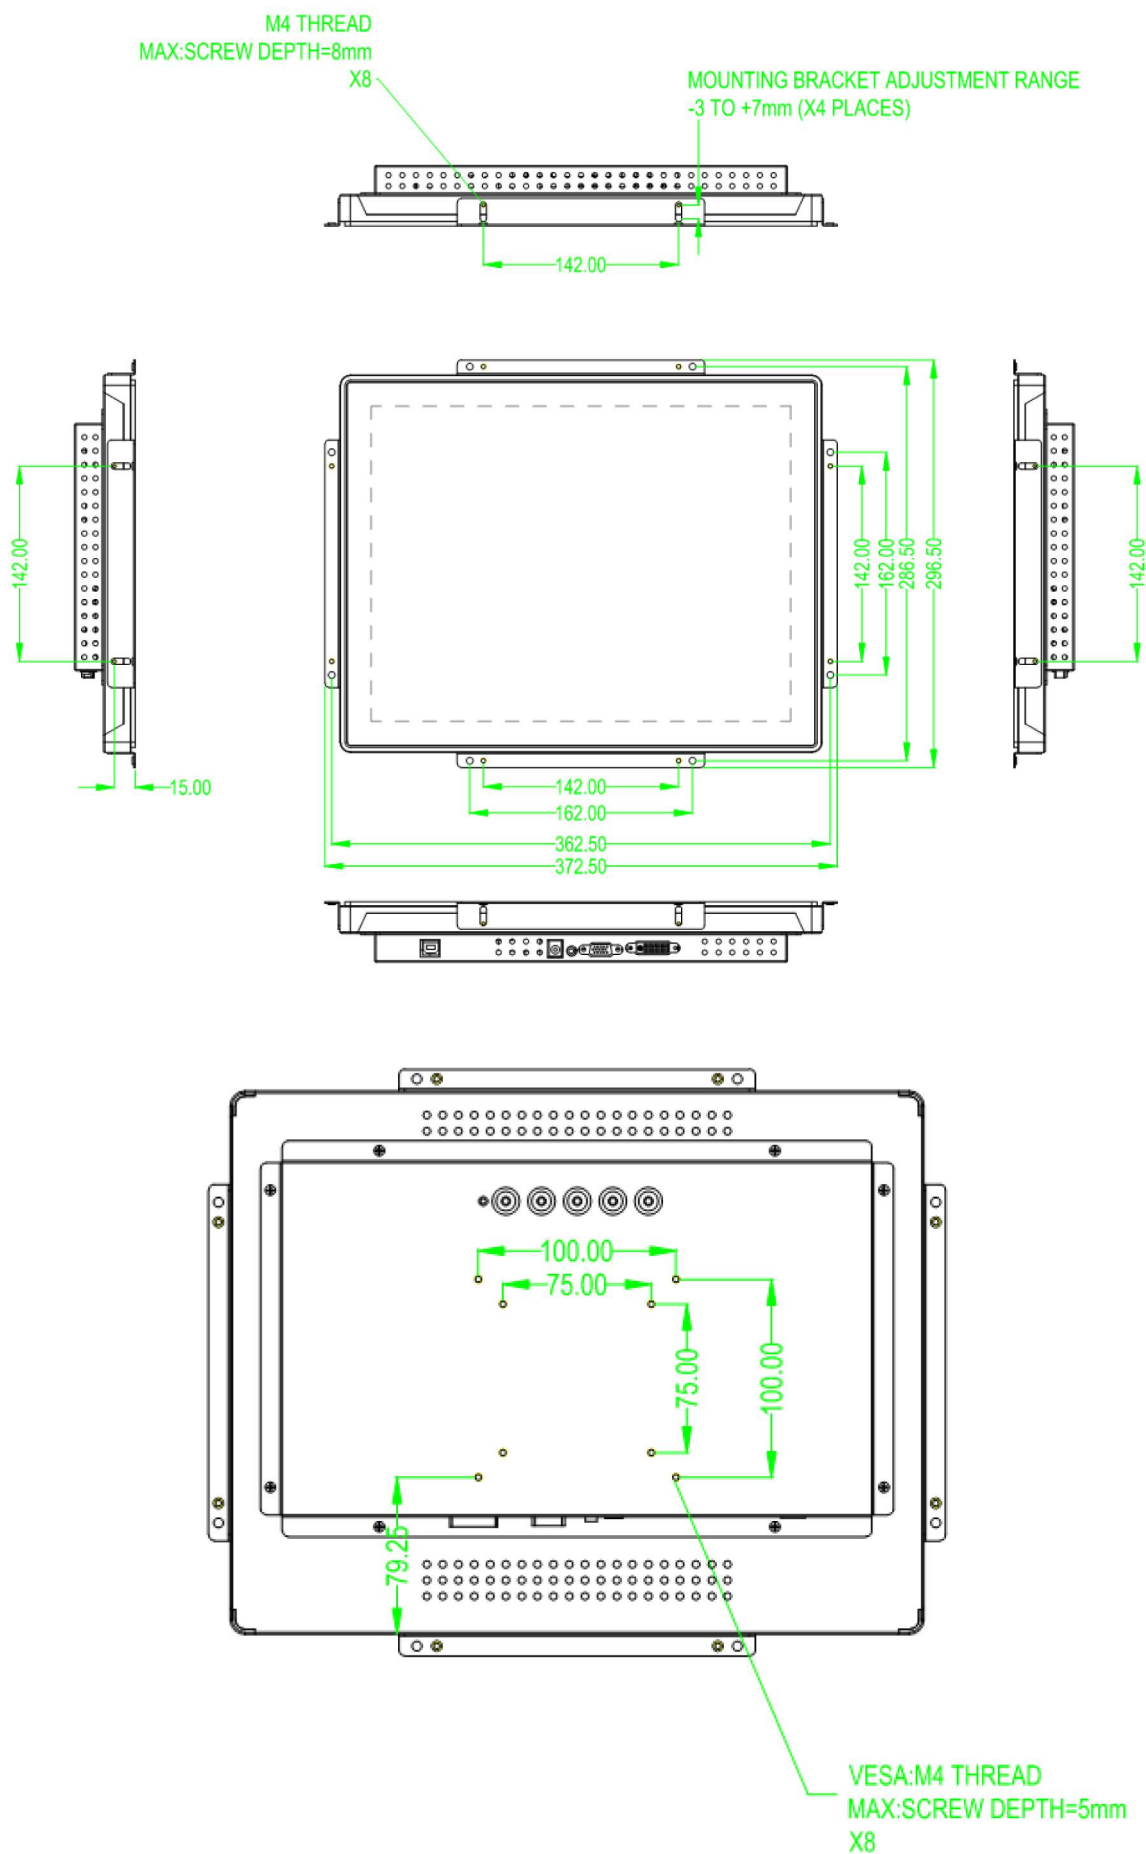



15" P-cap Touch Monitor

