15.6" P-cap Touch Screen Monitor

Interact with Ideas



Features

- > Designed by Horsent, Ultral-thin body for generous smart display
- > Zero bezel, VESA wall mount and desktop stand
- > Capacitive 10 points sensitive touchscreen technology
- > Vivid FHD LED Backlight with 16.7 million color
- > Durable and reliable
- > Cost-competitive
- > Standard Brightness: 250 nit
- > Supported for Windows 11

Applications

- > Interactive Ads
- > Commercial & Retail


- > Presentation
- > Self-service



Specifications

Product Name		15.6 inch P-cap Touch Screen Monitor		
Product Model		H1516PWH-UH		
	Size	15.6inch		
	Aspect Ratio	16:9		
	Backlight	LED		
	Pixel Pitch	0.252mm x 0.252mm		
	Active Area	Horizontal: 344.16mm Vertical: 193.59mm		
	Best Resolution	1920 x 1080 @ 60Hz		
	Response Time	30ms		
LCD Panel	Colors	16.7 million		
	Brightness	250nit		
	Contrast Ratio	700:1 (Standard Value)		
	Viewing Angle (CR > 10)	Horizontal: 170° (85°/85°) Vertical: 160° (80°/80°)		
	Video Input Format	RGB Analog Signal/ Digital Signal		
	Video Input Interface	VGA/HDMI		
	Input Frequency	Horizontal: 30~82Hz Vertical:50~75Hz		
	Power Consumption	≤12W		
Touch Screen	Touch Screen Type	Capacitive Touch Screen		
	Cover Glass	2mm		
	Transparency	87%		
	Hardness	7H		
Touch Screen	Interface	USB2.0		
	Touch Point	10		
	Response Time	≤10 ms		
	Touch Method	Finger / Capacitive Pen		
	Touch Lifespan	≥50,000,000 times		
	Single-point OS	Windows 7,8,10, Linux		
	Multi-point OS	Windows 10,11, Android 7 and later		
Overview	Dimension	388.5mm x 240.7mm x 30mm		
	OSD Panel(Optional)	Power Switch, Menu, Up, Auto, Down		
	Power Supply	Input: DC 12V ± 5%		
	Power Consumption	Max: 20W		
	Installation	Wall Mount VESA 75mm x 75mm		
	Accessory	Power Line 1.5m, CCC / EU / US / UK standard, Black(Optional)		
		Signal Line VGA, HDMI, 1.5m/1.8m, male to male(Optional)		
		USB Wire A male to B male, 1.8m		
		External Adapter: WT1203000, 12V/3.0A, 115mm x 47mm x 31mm		
		Length: 1.0m, ¢2.0, Black		
	Temperature	Operating: 0°C-40°C; Storage: -20°C-60°C		
	Humidity	Operating: 20%-80%; Storage: 10%-90%		
	Operation Altitude	< 3000m		
	MTBF	50,000 hours demonstrated		
	Net Weight	3.8kg		
	Agency Approvals	CCC, FCC, CE, RoHS		
	Warranty	1 Year		

TITLE: H1516PW-UH

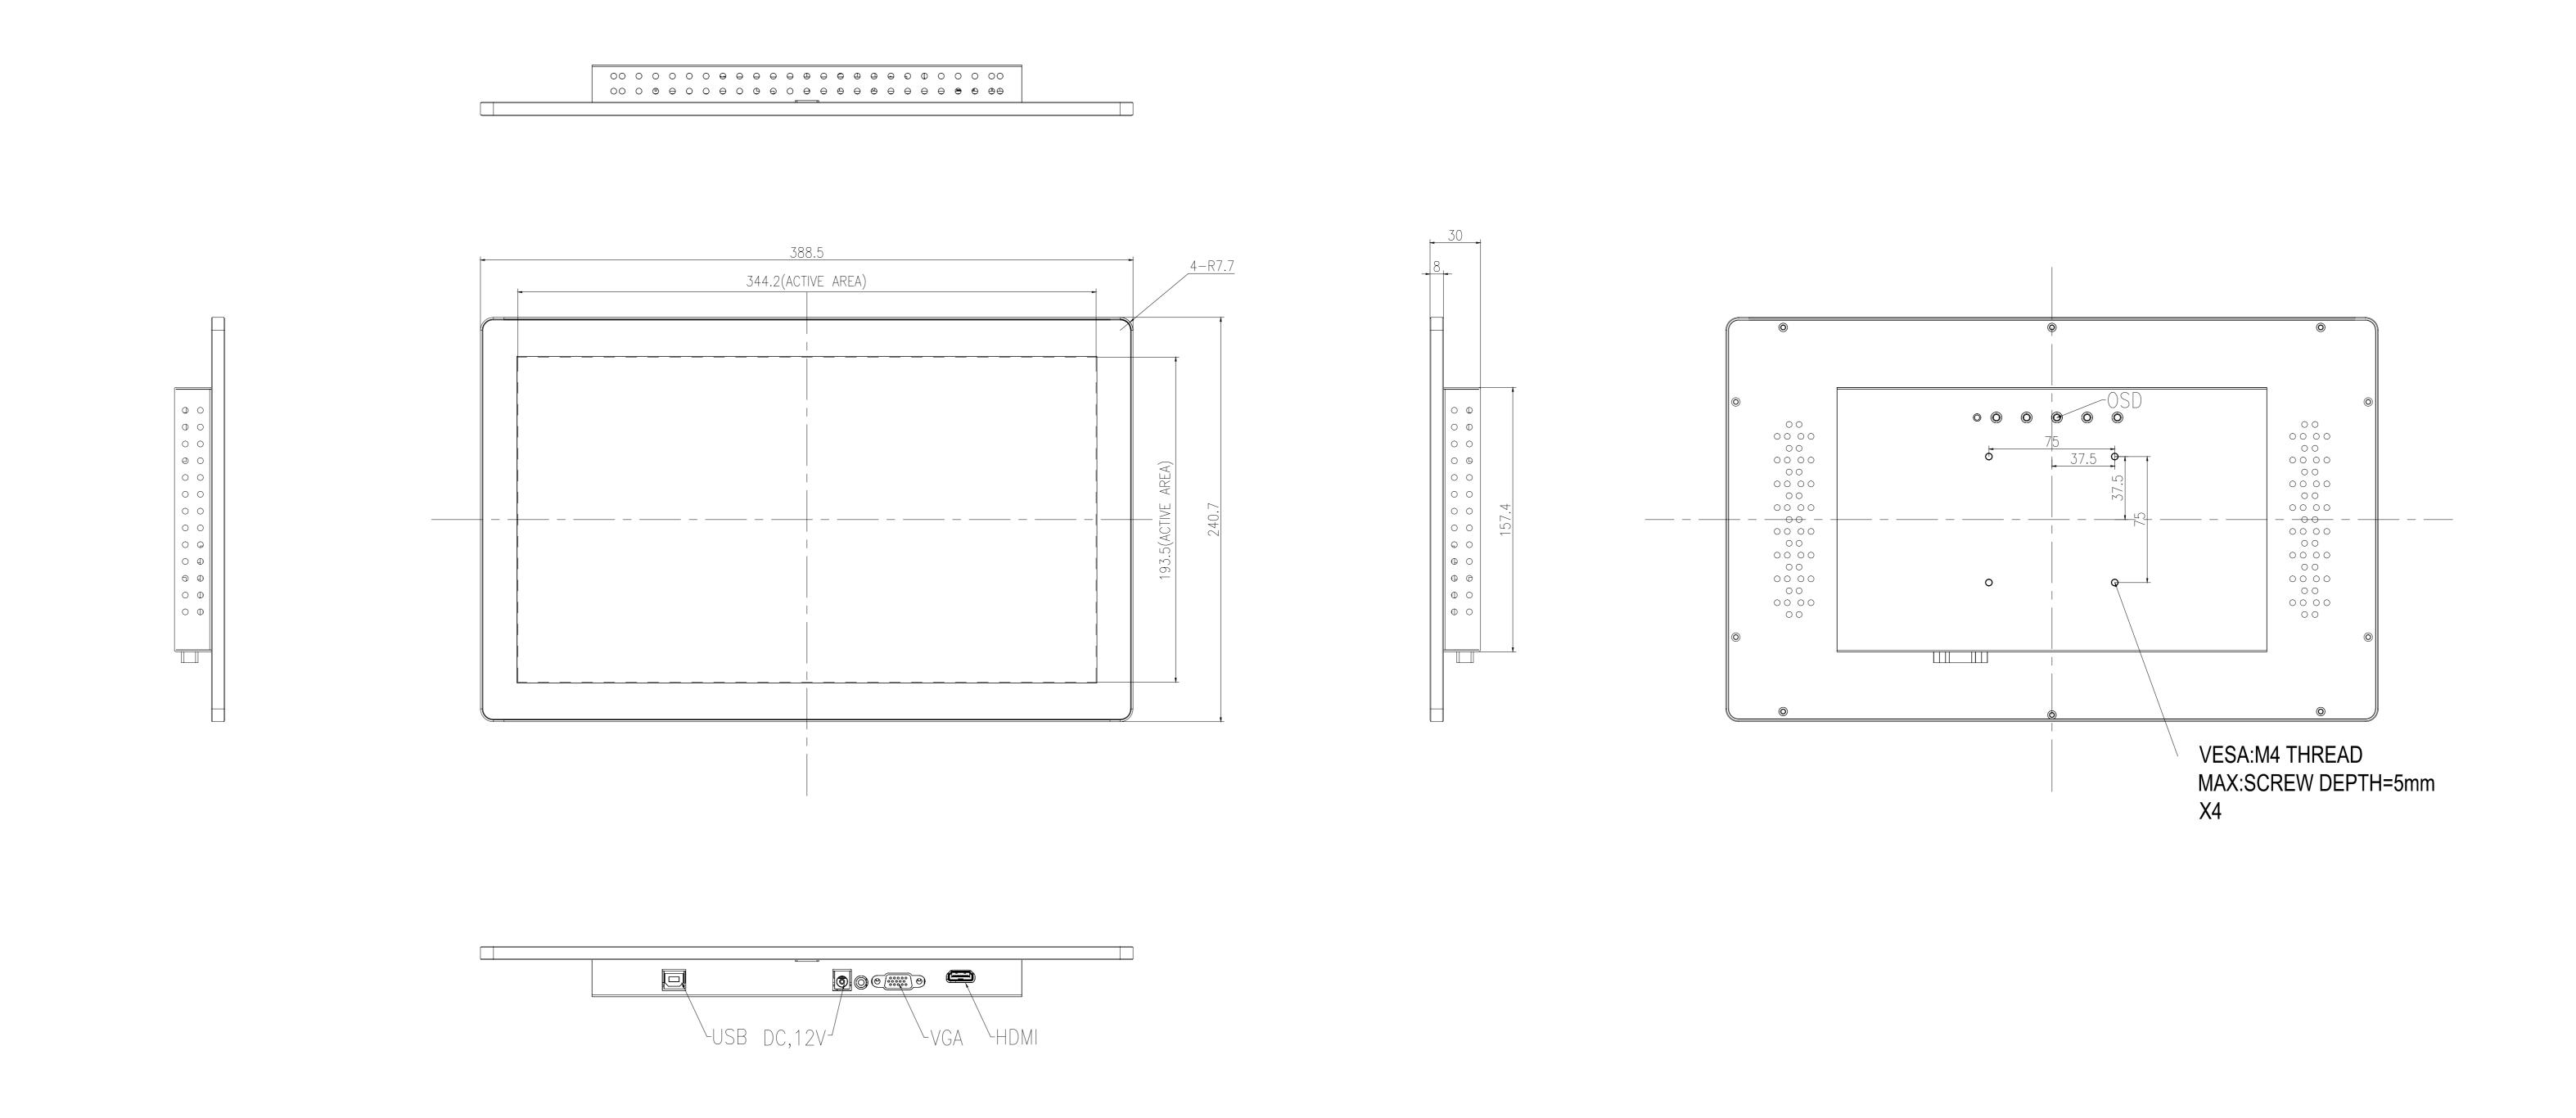

Tolerance: ±1.0mm				DATE: 2022.08.16
SHEET	1	OF		REV:V1.0