

15.6" P-cap Touch Monitor



Model	H1512PWH-UC
Touch Technology	P-cap
Version	V 1.0



All right reserved, Horsent Technology Co., Ltd



Open-frame Touch Monitor

Horsent designs H1512PW-UH open-frame multi-touch monitor for high traffic vertical applications, such as finance, gaming, industry, self-service terminal, etc.

The H1512PW -UH applies high performance PCAP touch technology, offers excellent 10-point touch and tablet-like user experience.

The durable, light weighted, display module delivers image with high resolution and clarity, but still low power consumption.

The H1512PW -UH features a special designed mounted-molded front bezel, enables perfect matched mounting to your kiosk with great dust&water resistance.



Features

- 10-point touch
- Slim bezel
- Firmly sealed
- Accurate touch
- Compact design
- Easy to install
- Flush mounted




Applications

- ATM
- Tickets machine
- Vending machine
- Information terminal
- Gaming machine



Product Name		15.6 inch LCD Touch Monitor	
Product Model		H1512PWH-UH	
LCD panel	Size	15.6 inch	
Technical Parameter	Aspect Ratio	16 : 9	
	Backlight Type	LED Backlight	
	Pixel Pitch	0.252mm x 0.252mm	
	Active Area	344.16mm x 193.59mm	
	Best Resolution	1920 × 1080 @ 60 Hz	
	Response Time	30ms	
	Color	16.7million	
	Brightness	LCD Panel: 300 cd/m ²	
	Contrast Ratio	700:1 (standard Values)	
	Viewing Angle (CR > 10)	Horizontal: 170° (85°/85°) Vertical: 170° (85°/85°)	
	Video Input Format	RGB Analog Signal/ Digital Signal	
	Video Input Interface	VGA / DVI	
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz	
	Power Consumption	≤12W	
Touch Screen	Touch Screen Type	Capacitive Touch Screen	
Technical Parameter	Gover Glass	2.4mm	
	Transparency	87%	
	Hardness	7H	
	Interface	USB2.0	
	Touch Point	10	
	Response Time	≤10 ms	
	Touch Method	Finger / Capacitive Pen	
	Touch Lifespan	≥50,000,000	
	Linearity	< 2%	
	Single-point OS	Windows XP , Linux	
	Multi-point OS	Windows7/8/10/11 , Android	
Touch Monitor	Boundary Dimension	382mm × 248mm × 44.5mm	
	OSD Panel	Optional Accessory : Power switch、 Menu、 Up、 Auto、 Down	
	Power Supply	Input : DC 12V±5%	
	Power Consumption	Max : 20w; Sleep : 2w; Off : 1w	
	Installation	Side Mounting Bracket , VESA 75mm&100mm	
	Accessory (Optional)	Signal Line	VGA , D-SUB 15pin , male to male , 1.5m
		USB Wire	A male to B male , 1.8m
		Adaptor	WT1203000 , 12V/3.0A , 115mmx47mmx31mm , Length 1.0m , ϕ 2.5 ,
		Power Line	Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C ; Storage: -20°C-60°C	
	Humidity	Operating: 20%-80%; Storage: 10%-90%	
	Operation Altitude	< 3000m	
	Warranty	1 year	



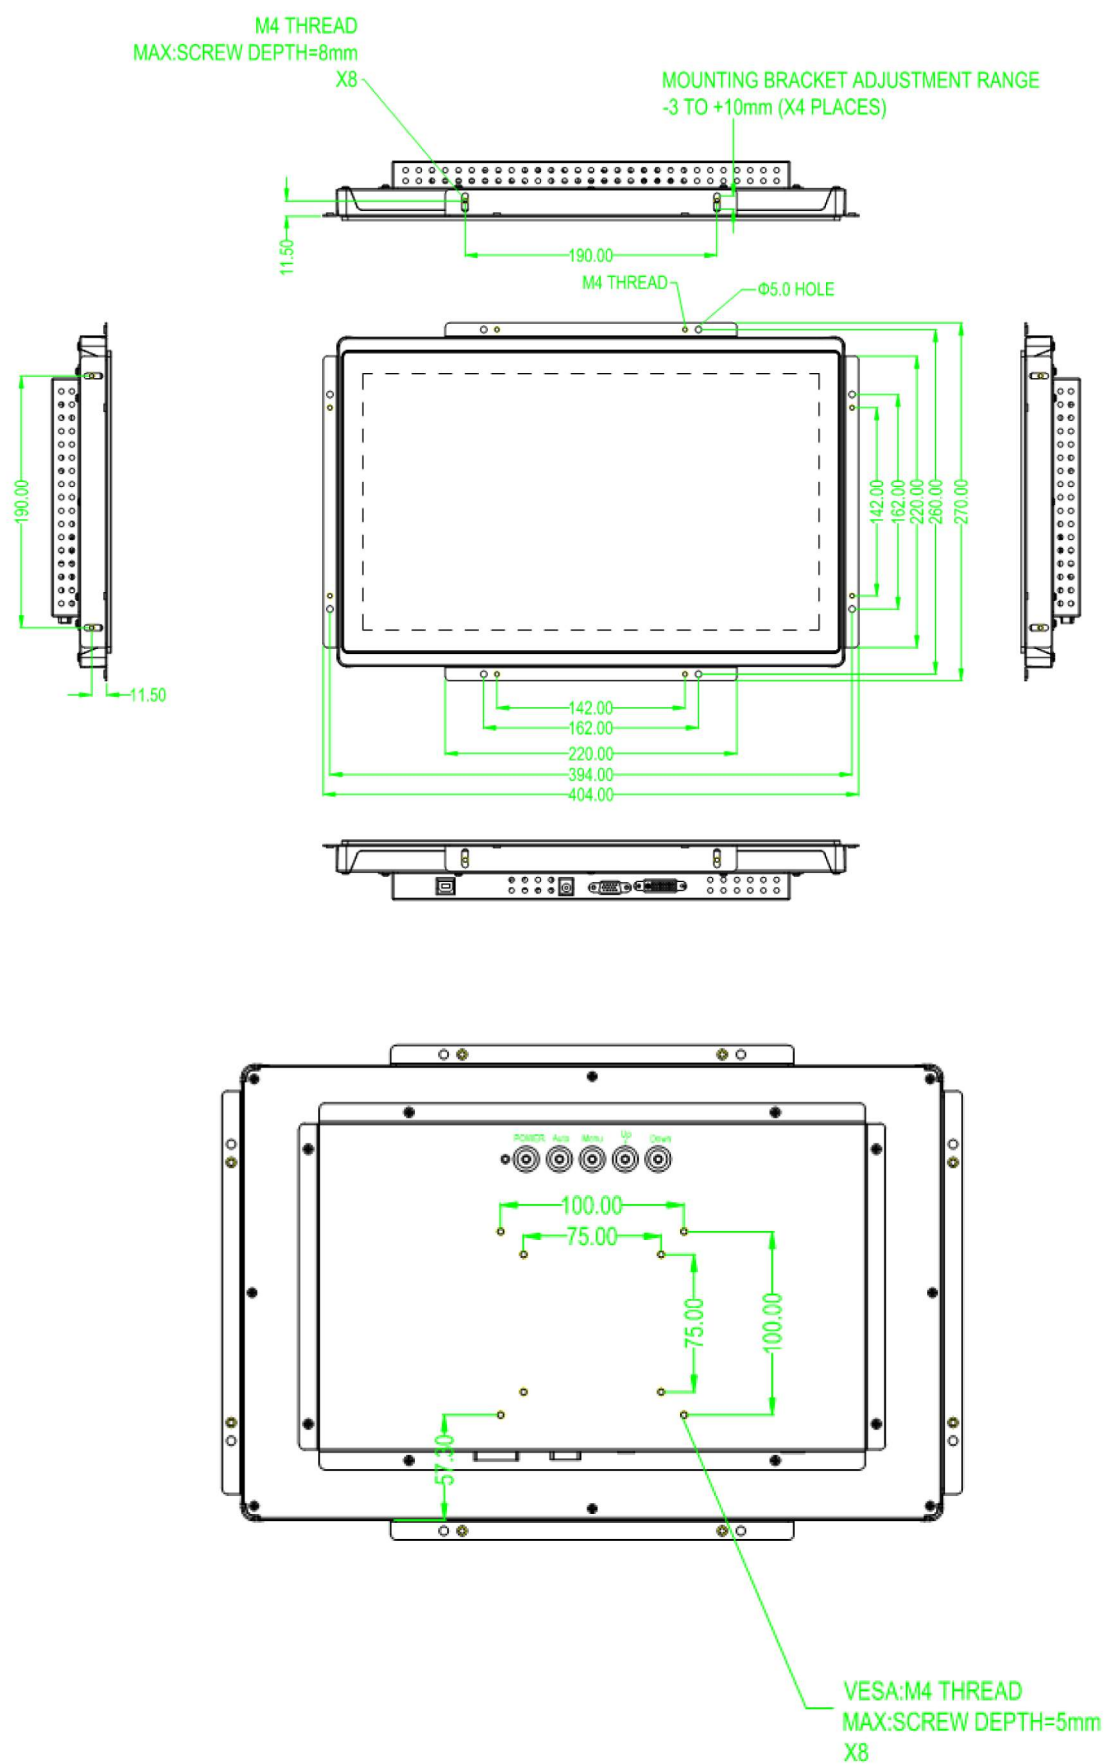



15.6" P-cap Touch Monitor

